Technical Specifications

HP Series 7 Pro 27 inch QHD Monitor - 727pq




I. Power Button

Front

2. Power LED

Technical Specifications

HP Series 7 Pro 27 inch QHD Monitor - 727pq

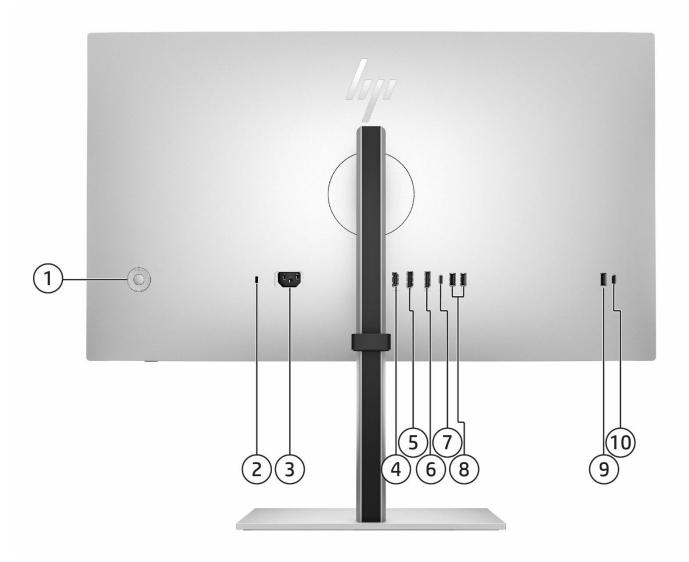

- 1. OSD Button
- **2.** Security Cable Slot
- 3. Power Connector
- 4. HDMI 2.0
- **5.** DisplayPort™ 1.4 port

Back

- **6.** DisplayPort[™] 1.4 out port
- **7.** USB Type-C® 10Gbps signaling rate (Upstream Hub enablement data)
- **8.** 2 USB Type-A 10Gbps signaling rate
- 9. USB Type-A 10Gbps signaling rate (charging),
- **10.** USB Type -C[®] 10Gbps signaling rate (charging)

Technical Specifications

Model: 8J4D8AA, 8J4D8A5, 8J4D8AT, 8J4D8E9

Panel Specifications Display Size (Diagonal) 27" (68.6 cm)

27" (68.47 cm) Viewable Diagonal Size Panel Technology **IPS Black** Flat Curvature **Max Refresh Rate** 120 Hz

Native Resolution QHD (2560 x 1440) **Panel Bit Depth** 10 bit (8 bit + FRC)

Aspect Ratio 16:9 400 nits **Brightness (Typical)**

HDR VESA DisplayHDR™ 400

Display Contrast Ratio (Static) 2000:1 Flicker Free Yes

Pixel Pitch 0.23 x 0.23 mm

Pixels Per Inch (PPI) 109 PPI

Display Colors Up to 1.07 billion colors supported* *Number of colors through A-FRC technology.

Backlight Lamp Life Minimum (To Half

30k **Brightness - In Hours)**

Backlight Type Edge-lit **Screen Treatment** Anti-glare

Hardness ЗН 25% Haze

5ms GtG (with overdrive) Response Time (Typical)

Horizontal Viewing Angle

(Typical Cr>10) 178° Vertical Viewing Angle (Typical Cr>10)

Panel Active Area Metric (W X H) 59.67 x 33.57 cm Panel Active Area Imperial (W X H) 23.49 x 13.22 in

NOTE: Performance specifications represent the typical specifications provided by HP's component

178°

manufacturers; actual performance may vary either higher or lower.

Variable Refresh Rate Technology AMD FreeSync™ Premium

Color sRGB 100%

> Display P3 98%

Color Management Factory Color Calibrated Yes

> **Calibrated Color Presets** Display P3, BT.709 D65, sRGB D65 **Color Space/ Subsampling Support** RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

RGB Channel Adjust Yes, Gain

Host software (Windows or macOS) **User Calibration Support**

Technical Specifications

External Calibration SupportX-Rite i1Display ProStandalone/ Schedulable CalibrationYes, SchedulableDefault Color TemperatureDisplay P3

Monitor Specifications

Bezel Type4-sided borderlessColor Of StandBlack and SilverColor Of HeadBlack and SilverTilt-5 to +20°Swivel±45°Pivot±90°

Vesa Mounting 100 mm x 100 mm (bracket included)

Security Lock Security lock-ready

Detachable Stand Yes

Height Adjust Range

Warranty 3/3/0 for LA, NA, EMEA, APJ (3/3/3 in select APJ Countries)

Yes, HP Eye Ease (TÜV Low Blue Light Hardware

150 mm

Solution certified)

Zero Bright Dot Guarantee Yes*

*The HP Pixel Policy allows no bright sub-pixel defects for

this display. For complete details, see

https://support.hp.com/us-en/document/ish_3908867-

3900920-16.

Management Software

HP Client Management Script Library (CMSL)*

HP Display Center**

* The Client Management Script Library must be downloaded to the connected PC to run CMSL commands. Some

limitations may apply to legacy displays. Visit support.hp.com to download HP CMSL.

**Host PC requires Windows 10 and above. HP Display Center

is available on the Microsoft store.

On Screen Display (OSD)

On Screen Display Image, Color, Input, Power, Menu, Management,

Information, Exit

Native Resolution QHD (2560 x 1440)*

* DisplayPort™ 1.4 or HDMI 2.0 required to drive panel at its

native resolution.

The video card of the connected PC must be capable of supporting 2560 × 1440 at 120 Hz with 10-bit color using

one DisplayPort™, HDMI.

The video card of the connected PC must be capable of supporting 2560 x 1440 at 60 Hz and include 1 HDMI or 1 DisplayPort™ outputs to drive the monitor at the Preferred

Mode.

Maximum Resolution QHD (2560 X 1440 @120Hz)

Preset Graphic Modes/Supported 640 x 480 @ 60 Hz **Resolutions** 640 x 480 @ 75 Hz

720 x 400 @ 70 Hz 800 x 600 @ 60 Hz



Technical Specifications

800 x 600 @ 75 Hz 1024 x 768 @ 60 Hz 1024 x 768 @ 75 Hz 1280 x 720 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1600 x 1200 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 50 Hz 1920 x 1080 @ 60 Hz 1920 x 1080 @ 100 Hz 1920 x 1080 @ 120 Hz 1920 x 1200 @ 60 Hz 2560 x 1440 @ 60 Hz 2560 x 1440 @ 75 Hz 2560 x 1440 @ 100 Hz 2560 x 1440 @ 120 Hz

Minimum Vertical Scan Rate48 HzMaximum Vertical Scan Rate120 HzMinimum Horizontal Scan Rate30 kHzMaximum Horizontal Scan Rate190 kHzMaximum Pixel Clock500 MHzUser Programmable ModesYes, 22

User-Assignable Function Buttons Yes, 4 (6 options)

Languages 11 (German, Simplified Chinese, Traditional Chinese,

English, Spanish, French, Italian, Japanese, Netherlands, Brazilian Portuguese, Russian)

Connector TypesDisplayPort™1 DisplayPort™ 1.4

DisplayPort™ Out 1 DisplayPort™ 1.4-out

HDMI 1 HDMI 2.0

HDCP Yes, DisplayPort™ and HDMI

USB Type-C[®] 1 USB Type-C[®] 10Gbps signaling rate upstream

USB Type-C® Data Transfer Only 1 USB Type-C® 10Gbps signaling rate (15 W charging)

USB Type-A 3 USB Type-A 10Gbps signaling rate (1 charging with

7.5 W)

Special Features Switch Brightness, Color, Next Active Input, Display

Information

User Presets 22

User Updateable Firmware Yes

Other Special Features Ambient Light Sensor

Daisy chain

Pantone validated



| recinical specifical | 10115 | |
|-----------------------------------|---|--|
| Power & Operating Specs | Power Supply | Internal |
| | Power Source | 100 – 240 VAC 50/60 Hz |
| | Power Consumption- Max | 91 W |
| | Energy Saving/Stand By Mode | 0.5 W |
| | Power Consumption - Typical | 38 W |
| Fueren Stev Dete | On exercisms I Made at 100 VAC | 17 74 W |
| Energy Star Data | Operational Mode at 100 VAC Operational Mode at 115 VAC | 17.74 W 17.73 W |
| | Operational Mode at 230 VAC | 17.73 W 17.94 W |
| | operational rioue at 250 title | |
| EU Energy Efficiency | On-mode Power Consumption for | 26 W |
| Class (ErP LOT-5) | Standard Dynamic Range (SDR) | |
| | ErP LOT5 Energy Efficiency Class for | Ā F |
| | Standard Dynamic Range (SDR) | u |
| | On-mode Power Consumption for High Dynamic Range (HDR) | 40 W |
| | ErP LOT5 Energy Efficiency Class for High | A |
| | Dynamic Range (HDR) | G G |
| | | |
| Operating Conditions | Operating Temperature - Celsius | 5~35°C |
| | Operating Temperature - Fahrenheit | 41– 95°F |
| | Non-Operating Temperature - Celsius | −20 − 60°C |
| | Non-Operating Temperature - Fahrenheit | −4 − 140°F |
| | Operating Humidity | 20 – 80% Relative Humidity (non-condensing) |
| | Non-Operating Humidity | 5~95%RH |
| | Operating Altitude Metric | 0~5,000m |
| | Non-operating Altitude Metric | 0~12,192m |
| | Operating Altitude Imperial | 0~16,400ft |
| | Non-operating Altitude Imperial | 0~40,000ft |
| Certifications and Compliances | Low Halogen | Yes* |
| compliances | | *External power supplies, WWAN modules, power cords, cables and peripherals excluded. |
| | Agency Approvals and Certifications | WW application CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/ EAC/UL/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified Edge/Energy Star/ISC/VCCI/FCC/BSMI/Korea MEPS/Ukraine EE/Belarus EE /WEEE/GS/Low Blue light/UAE/Ukraine/BIS/RCM |
| | Microsoft WHQL Certification | Windows 11, Windows 10 |
| | ENERGY STAR® Certified | Yes |
| | EPEAT® Registered | EPEAT® Gold in United States* |



Technical Specifications

Plastics

*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit www.epeat.net for more information.

China Energy Label CEL Grade 2 Yes

TCO Certified Edge **TCO Certified** Yes

SmartWay Transport Partnership - NA Yes (NA sku)

only

Contains Recycled Contains Recycled Plastics 90% post-consumer recycled plastic *

> *Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.

Recycled Metal 90% recycled aluminum *

Made with 15% recycled steel

*Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for

metal parts over 25 grams.

Recyclable Packaging (Box, packing

materials)

Molded paper pulp cushion inside box is 100% sustainably sourced and recyclable*; Outside box and corrugated cushions are 100% sustainably sourced and recyclable**

*Molded pulp cushions are made from 100% recycled wood fiber and organic materials.

**100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.

Unit Product/Package **Specifications**

Product Dimensions (Unpacked with stand) (W x D x H)

Product Dimensions (Packed) (W x D x H)

Display Head Dimensions (Unpacked without stand) (W x D x H)

Base Area Footprint (w x d mm)

Product Weight (Unpacked with stand) **Product Weight**

(Packed) **Product Weight**

(Head Only)

Pallet Dimensions (L x W x H mm)

Metric **Imperial** 24.15 x 8.87 x 21.28 in 61.34 x 22.52 x 54.05 cm

71.5 x 16.1 x 45.5 cm 28.15 x 6.34 x 17.91 in

61.34 x 7.45 x 35.40 cm 24.15 x 2.93 x 13.94 in

256 x 195 mm 10.08 x 7.68 in

6.2kg 13.7lb

9.5 kg 20.9 lb

10.34lb 4.69kg

Slip Sheet: 1150 x 735 x Slip Sheet: 45.28 x 28.94 2291 mm (40'HQ) x 90.2 inch (40'HQ)



Pallet Information

Technical Specifications

Pallet: 1150 x 735 x 1957 Pallet: 45.28 x 28.94 x mm (40'ft) 77.05 inch (40'ft)

mm (40'ft) 77.05 inch (40'ft) Slip Sheet: 337.8 kg Slip Sheet: 744.7 lb

(40'HQ) (40'HQ)

Pallet: 280.4 kg (40'ft) Pallet: 618.2 lb (40'ft)

Slip Sheet: 5 layers (40'HQ)
Pallet: 4 layers (40'ft)

Pallet Product per Layer 7 set

Total Products per PalletSlip Sheet: 35 sets (40'HQ)
Pallet: 28 sets (40'ft)

Container Load, 20-Foot392 sets (Slip Sheet and Pallet)Container Load, 40-Foot896 sets (Slip Sheet and Pallet)Container Load, 40-Foot HighQ1120 sets (Slip Sheet and Pallet)

What's in the box? AC power cord (1.83m) 5.9ft

HDMI 2.0 cable (1.8m) 5.9 ft (Selected SKUs) USB 3.1 C-A cable (1.8m) (Selected SKUs) DisplayPort™ 1.4 cable (1.8m) (Selected SKUs)

Warranty

Quick Setup Poster Color calibration report VESA Mount Adapter

Pallet Total Weight

Pallet Layers

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian English US (EN), English AP (EN-AP), English LA (EN-LA). English UK (EN-GB). Arabic (AR) -17x. Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK), Vietnamese (VI)

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S,

Technical Specifications

ENVIRONMENTAL DATA

| Eco-Label Certifications & declarations Sustainable Impact Specifications | This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: IT ECO declaration US ENERGY STAR® US Federal Energy Management Program (FEMP) EPEAT® Gold registered in the United States. See http://www.epeat.net for registration status in your country. TCO Edge Certified China Energy Conservation Program (CECP) China State Environmental Protection Administration (SEPA) Taiwan Green Mark Korea Eco-label Japan PC Green label* 80% ITE – derived closed loop plastic. 65% recycled metal Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable Recycled Plastic cushions | | | |
|--|---|---|--|--|
| | | | | |
| Energy Consumption (in accordance with US ENERGY STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz | |
| Normal Operation (Long idle) | 17.73 W | 17.94 W | 17.73 W | |
| Sleep | 0.22 W | 0.22 W | 0.22 W | |
| Off | 0.12 W | 0.19 W | 0.09 W | |
| | model family. HP computers ma U.S. Environmental Protection A family does not offer ENERGY ST | gency (EPA) ENERGY STAR® specif AR® compliant configurations, the curing a hard disk drive, a high effi | are compliant with the applicable ications for computers. If a model en energy efficiency data listed is | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz | |
| Normal Operation (Long idle) | 37.79 BTU/hr | 38.06BTU/hr | 37.85 BTU/hr | |
| Sleep | 0.68 BTU/hr 0.82 BTU/hr | | 0.64 BTU/hr | |
| Off | 0.41 BTU/hr | 0.41 BTU/hr 0.54 BTU/hr 0.41 BTU/ | | |
| | *NOTE: Heat dissipation is calculattained for one hour. | ated based on the measured watt | s, assuming the service level is | |
| Longevity and Upgrading | This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the | | | |
| | Spare parts are available throughout the warranty period and or for up to "5" years after the end of production. | | | |



| Additional Information | (RoHS) This Hi Equipr This pi Safe D This pi level, s | roduct is in compliance with the Restrictions of Hazardous Substally directive - 2011/65/EC. P product is designed to comply with the Waste Electrical and Element (WEEE) Directive - 2002/96/EC. roduct is in compliance with California Proposition 65 (State of Carinking Water and Toxic Enforcement Act of 1986). roduct is in compliance with the IEEE 1680 (EPEAT) standard at the see www.epeat.net as parts weighing over 25 grams used in the product are marked 469 and ISO1043. roduct is 98.1% recycle-able when properly disposed of at end contact is 98.1% recycle-able when properly disposed o | ectronic California; Che Gold per |
|------------------------|--|--|--|
| Packaging Materials | External: | PAPER/Paperboard | 1830 g |
| | | PAPER/Molded Pulp | 660 g |
| | Internal: | PLASTIC/Polyethylene Expanded – EPE | 30 g |
| | | ckaging material contains at least 0% recycled content. | |
| | | d paper packaging materials contains at least 92.7% recycled co | |
| RoHS Compliance | HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. | | |
| | We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. To obtain a copy of the HP RoHS Compliance Statement, see, HP RoHS position statement. | | |
| | | · · · · · · · · · · · · · · · · · · · | |
| Material Usage | To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement. This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specification s.html): Asbestos Certain Azo Colorants Certain Brominated Flame Retardants – may not be used as flame retardants in plastics Cadmium Chlorinated Hydrocarbons Chlorinated Paraffins Bis(2-Ethylhexyl) phthalate (DEHP) Benzyl butyl phthalate (BBP) Dibutyl phthalate (DBP) Diisobutyl phthalate (DIBP) Formaldehyde Halogenated Diphenyl Methanes Lead carbonates and sulfates | | |



| | Mercuric Oxide Batteries Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances Polybrominated Biphenyls (PBBs) Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) | |
|--|---|--|
| Packaging Usage | HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. | |
| End-of-life Management and Recycling | HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. | |
| HP, Inc. Corporate Environmental Information | For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates: http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842 and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf | |



| footnotes | Percentage of ocean-bound plastic contained in each component varies by product Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. |
|-----------|---|
| | External power supplies, WWAN modules, power cords, cables and peripherals excluded. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. Fiber cushions made from 100% recycled wood fiber and organic materials. Plastic cushions are made from >90% recycled plastic. |



Technical Specifications

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

| Change Log | | | | |
|-------------------|----------|---------|---|--|
| | | | | |
| November 29, 2024 | V1 to V2 | Added | HP Client Management Script Library (CMSL) | |
| December 11, 2024 | V2 to V3 | Updated | HP Client Management Script Library (CMSL) Footnote | |
| March 7, 2025 | V3 to V4 | Updated | Zero Bright Dot Warranty | |
| | | | | |
| | | | | |
| | | | | |

