Technical Specifications

HP Series 7 Pro 27 inch QHD Thunderbolt 4 Monitor - 727pu




Front

I. Power Button

2. Power LED

Technical Specifications

HP Series 7 Pro 27 inch QHD Thunderbolt 4 Monitor - 727pu

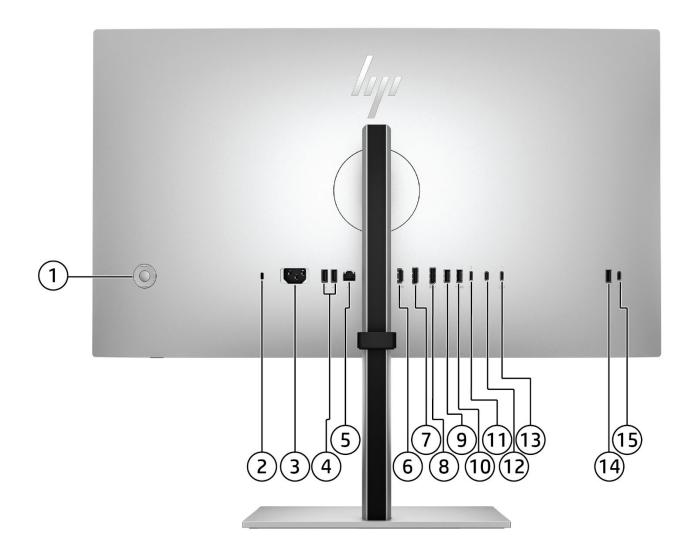

- 1. Joypad OSD button
- **2.** Security Cable Slot
- 3. Power Connector
- 4. 2 USB Type-A 10Gbps signaling rate port
- **5.** RJ-45 (10/100/1000 Mbps) (Network Port)
- 6. HDMI 2.0 Port
- **7.** DisplayPort[™] 1.4 port
- 8. DisplayPort™ 1.4 out port

Back

- **9.** USB Type-A 10Gbps signaling rate
- **10.** USB Type-A 10Gbps signaling rate, dedicated port for keyboard for KVM switch
- **11.** USB Type-C® 10Gbps signaling rate (Upstream Hub enablement data)
- **12.** Thunderbolt[™] 4 Out port for daisy chain (charging),
- **13.** Thunderbolt[™] 4 40Gbps (up to 100 W USB Power Delivery, DisplayPort[™] 1.4)
- **14.** USB Type-A 10Gbps signaling rate (charging)
- **15** USB Type-C[®] 10Gbps signaling rate (charging)



Technical Specifications

Model: 8J9E6AA, 8J9E6E9, 8J9E6AT, 8J9E6A5

Panel Specifications Display Size (Diagonal) 27" (68.6 cm)

Viewable Diagonal Size 27" (68.47 cm)
Panel Technology IPS Black
Curvature Flat
Max Refresh Rate 120 Hz

Native ResolutionQHD (2560 x 1440)Panel Bit Depth10 bit (8 bit + FRC)

Aspect Ratio 16:9
Brightness (Typical) 400 nits

HDR VESA DisplayHDR™ 400

Display Contrast Ratio (Static) 2000:1

Display Contrast Ratio (Dynamic) 10000000:1 = 10M:1

Flicker Free Yes

Pixel Pitch 0.23 x 0.23 mm

Pixels Per Inch (PPI) 109 PPI

Display ColorsUp to 1.07 billion colors supported*

*Number of colors through A-FRC technology.

Backlight Lamp Life Minimum (To Half

Brightness - In Hours)

Backlight TypeEdge-litScreen TreatmentAnti-glareHardness3HHaze25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle (Typical Cr>10)

Vertical Viewing Angle (Typical Cr>10)

178°

Panel Active Area Metric (W X H) 59.67 x 33.57 cm Panel Active Area Imperial (W X H) 23.49 x 13.22 in

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Variable Refresh Rate Technology AMD FreeSync™ Premium

Color SRGB 100%

Display P3 98%

Color Management Factory Color Calibrated Yes

Calibrated Color PresetsDisplay P3, BT.709 D65, sRGB D65Color Space/ Subsampling SupportRGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

RGB Channel Adjust Yes, Gain

User Calibration Support Host software (Windows or macOS)

External Calibration SupportStandalone/ Schedulable Calibration
X-Rite i1Display Pro
Yes, Schedulable

Default Color Temperature Neutral



Technical Specifications

| Monitor | |
|----------------|--|
| Specifications | |

Bezel Type 4-sided borderless

Color Of StandBlack and SilverColor Of HeadBlack and SilverTilt-5 to +20°Swivel±45°Pivot±90°Height Adjust Range150 mm

Vesa Mounting 100 mm x 100 mm (bracket included)

Security Lock Security lock-ready

Detachable Stand Yes

Warranty 3/3/0 for LA, NA, EMEA, APJ (3/3/3 in select APJ Countries)

Low Blue Light

Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified)

Zero Bright Dot Guarantee Yes*

*The HP Pixel Policy allows no bright sub-pixel defects for this display. For complete details, see https://support.hp.com/us-

en/document/ish_3908867-3900920-16.

Management Software

HP Client Management Script Library (CMSL)*

HP Display Center**

* The Client Management Script Library must be downloaded to the connected PC to run CMSL commands. Some limitations may apply to legacy displays. Visit support.hp.com to download

HP CMSL.

**Host PC requires Windows 10 and above. HP Display Center is

available on the Microsoft store.

On Screen Display (OSD)

On Screen Display

Native Resolution

Image, Color, Split Screen, Input, Power, Menu,

Management, Information, Exit

QHD (2560 x 1440)*

* DisplayPort™ 1.4 or HDMI 2.0 required to drive panel at its

native resolution.

The video card of the connected PC must be capable of supporting 2560 × 1440 at 120 Hz with 10-bit color using one DisplayPort $^{\text{TM}}$, HDMI, or USB Type-C $^{\text{©}}$ (DisplayPort $^{\text{TM}}$ alt mode),

Thunderbolt $^{\text{\tiny{TM}}}$.

The video card of the connected PC must be capable of supporting 2560 x 1440 at 60 Hz and include 1 HDMI or 1 DisplayPort™ outputs to drive the monitor at the Preferred

Mode

Maximum Resolution

Preset Graphic Modes/Supported

Resolutions

QHD (2560 X 1440 @120Hz)

640 x 480 @ 60 Hz 640 x 480 @ 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 800 x 600 @ 75 Hz

1024 x 768 @ 60 Hz 1024 x 768 @ 75 Hz

1280 x 720 @ 60 Hz

Technical Specifications

1280 x 1024 @ 60 Hz
1440 x 900 @ 60 Hz
1600 x 900 @ 60 Hz
1600 x 1200 @ 60 Hz
1680 x 1050 @ 60 Hz
1920 x 1080 @ 50 Hz
1920 x 1080 @ 60 Hz
1920 x 1080 @ 100 Hz
1920 x 1080 @ 120 Hz
1920 x 1200 @ 60 Hz
2560 x 1440 @ 60 Hz
2560 x 1440 @ 75 Hz
2560 x 1440 @ 100 Hz
2560 x 1440 @ 120 Hz

Minimum Vertical Scan Rate48 HzMaximum Vertical Scan Rate120 HzMinimum Horizontal Scan Rate30 kHzMaximum Horizontal Scan Rate190 kHzMaximum Pixel Clock500 MHzUser Programmable ModesYes, 22

User-Assignable Function Buttons

Languages

11 (German, Simplified Chinese, Traditional Chinese, English, Spanish, French, Italian, Japanese, Netherlands,

1 Thunderbolt™ 4 with USB Type-C® 40Gbps signaling

1 Thunderbolt[™] 4 Out for Daisy chain (15 W charging) 5 USB Type-A 10Gbps signaling rate (1 charging with 7.5

rate (up to 100 W USB Power Delivery, DisplayPort™ 1.4); 1 USB Type-C® 10Gbps signaling rate upstream (Up to 15W USB Power Delivery); 1 USB Type-C® 10Gbps

Brazilian Portuguese, Russian)

signaling rate (15 W charging)

1 RJ-45 (10/100/1000 Mbps)

Yes, DisplayPort™, HDMI and Thunderbolt™

Yes, 4 (8options)

1 DisplayPort™ 1.4

1 HDMI 2.0

1 DisplayPort™ 1.4-out

Connector Types

DisplayPort™ DisplayPort™ Out

HDMI

HDCP

USB Type-C® Video & Data Transfer

USB Type-C® Data Transfer Only

Thunderbolt™ Out

USB Type-A

Ethernet

Ethern

Special Features

Picture-in-Picture, Picture-by-Picture

Switch

Remote Manageability

User Presets

User Updateable Firmware

KVM Switch

Other Special Features Yes

W)

Next Active Input, Color, Split Screen (On/Off), Brightness

Out-of-Band MAPT, Out-of-Band WoL, PXE Boot

22 Yes

Yes, Keyboard switch

Ambient Light Sensor Single Power On Daisy chain

Pantone validated

Technical Specifications

| Power & Operating | Power Supply | Internal |
|---|---|--|
| Specs | | |
| | Power Source | 100 – 240 VAC 50/60 Hz |
| | Power Consumption- Max | 210 W |
| | Energy Saving/Stand By Mode | 0.5 W |
| | Power Consumption - Typical | 41 W |
| Energy Star Data | Operational Mode at 100 VAC | 20.54 W |
| | Operational Mode at 115 VAC | 20.26 W |
| | Operational Mode at 230 VAC | 20.69 W |
| EU Energy Efficiency | On-mode Power Consumption for | 26 W |
| Class (ErP LOT-5) | Standard Dynamic Range (SDR) | 20 W |
| EU Energy Efficiency Class (ErP LOT-5) | ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR) | A F |
| class (Ell Eol s) | On-mode Power Consumption for High | 42 W |
| | Dynamic Range (HDR) | · - ·· |
| | ErP LOT5 Energy Efficiency Class for High Dynamic Range (HDR) | â G |
| | Zynamie nange (nzn.) | |
| Operating Conditions | Operating Temperature - Celsius | 5~35°C |
| | Operating Temperature - Fahrenheit | 41–95°F |
| | Non-Operating Temperature - Celsius | −20 − 60°C |
| | Non-Operating Temperature - Fahrenheit | −4 − 140°F |
| | Operating Humidity | 20 – 80% Relative Humidity (non-condensing) |
| | Non-Operating Humidity | 5~95%RH |
| | Operating Altitude Metric | 0~5,000m |
| | Non-operating Altitude Metric | 0~12,192m |
| | Operating Altitude Imperial | 0~16,400ft |
| | Non-operating Altitude Imperial | 0~40,000ft |
| Certifications and Compliances | Low Halogen | Yes* |
| | | *External power supplies, WWAN modules, power cords, cables and peripherals excluded. |
| | Agency Approvals and Certifications | WW application CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/ EAC/UL/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified Edge/Energy Star/ISC/VCCI/FCC/BSMI/Korea MEPS/Ukraine EE/Belarus EE /WEEE/GS/Low Blue light/UAE/Ukraine/BIS/RCM |
| | Microsoft WHQL Certification | Windows 11, Windows 10 |
| | ENERGY STAR® Certified | Yes |
| | EPEAT® Registered | EPEAT® Gold in United States* |
| | | *Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit www.epeat.net for more information. |



Technical Specifications

| China Energy Label | CEL Grade 2 |
|--|--------------|
| TCO Certified Edge | Yes |
| TCO Certified | Yes |
| SmartWay Transport Partnership - NA only | Yes (NA sku) |

Contains Recycled Plastics

Contains Recycled Plastics 90% post-consumer recycled plastic *

*Recycled plastic content percentage is based on the definition

set in the IEEE 1680.1-2018 standard.

Recycled Metal 90% recycled aluminum * Made with 15% recycled steel

*Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for

metal parts over 25 grams.

Recyclable Packaging (Box, packing materials)

Molded paper pulp cushion inside box is 100% sustainably sourced and recyclable*; Outside box and corrugated cushions are 100% sustainably sourced and recyclable**

*Molded pulp cushions are made from 100% recycled wood fiber and organic materials.

**100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.

| Unit |
|-----------------|
| Product/Package |
| Specifications |

| Product Dimensions | |
|-----------------------------------|--|
| (Unpacked with stand) (W x D x H) | |

 Metric
 Imperial

 61.34 x 22.52 x 54.05 cm
 24.15 x 8.87 x 21.28 in

| Product Dimensions |
|--|
| (Packed) (W x D x H) |
| Display Head Dimensions |
| (Unpacked without stand) (W \times D \times H) |
| Base Area Footprint |
| / 1 \ |

Product Weight

Pallet Total Weight

(Head Only)

71.5 x 16.1 x 45.5 cm 28.15 x 6.34 x 17.91 in 61.34 x 7.45 x 35.40 cm 24.15 x 2.93 x 13.94 in

Base Area Footprint 256 x 195 mm (w x d mm)

Product Weight 7kg
(Unpacked with stand)

Product Weight 10.3 kg
(Packed)

195 mm 10.08 x 7.68 in

15.43lb

10.3 kg 22.7 lb 5.52kg 12.17lb

Pallet Information

Pallet Dimensions (L x W x H mm)

Slip Sheet: 1150 x 735 x Slip Sheet: 45.28 x 28.94 x 2291 mm (40'HQ) 90.2 inch (40'HQ) Pallet: 1150 x 735 x 1957 Pallet: 45.28 x 28.94 x 77.05

mm (40'ft) in: Slip Sheet: 365.8 kg Sl (40'HQ) Pa

inch (40'ft) Slip Sheet: 806.5 lb (40'HQ) Pallet: 667.6 lb (40'ft)

Pallet: 302.8 kg (40'ft)

Pallet Layers
Slip Sheet: 5 layers (40'HQ)
Pallet: 4 layers (40'ft)



Technical Specifications

Pallet Product per Layer 7 sets

Total Products per PalletSlip Sheet: 35 sets (40'HQ)
Pallet: 28 sets (40'ft)

Container Load, 20-Foot392 sets (Slip Sheet and Pallet)Container Load, 40-Foot896 sets (Slip Sheet and Pallet)Container Load, 40-Foot HighQ1120 sets (Slip Sheet and Pallet)

What's in the box? AC power cord (1.83m) 5.9ft

HDMI 2.0 cable (1.8m) 5.9 ft (Selected SKUs) USB 3.1 C-A cable (1.8m) (Selected SKUs) DisplayPort™ 1.4 cable (1.8m) (Selected SKUs)

Thunderbolt™. cable (1m)

Warranty

Quick Setup Poster Color calibration report VESA Mount Adapter

User Guide and Warranty Languages **User Guide Languages**

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian

Warranty Languages

English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK), Vietnamese (VI)

Technical Specifications

ENVIRONMENTAL DATA

| Eco-Label Certifications & | This product has received or is i | n the process of being certified | to the following approvals and | | | |
|-------------------------------|--|---|--------------------------------|--|--|--|
| declarations | may be labeled with one or mor | | to the following approvats and | | | |
| ucciai acions | IT ECO declaration | e or these marks. | | | | |
| | US ENERGY STAR® | | | | | |
| | | nagement Program (FEMP) | | | | |
| | • | d in the United States. See http:/ | //www.enest net for | | | |
| | registration status in y | · | //www.epeat.net for | | | |
| | TCO Certified | our country. | | | | |
| | China Energy Conserva | ation Program (CECD) | | | | |
| | | ntal Protection Administration (| (SEDA) | | | |
| | Taiwan Green Mark | mati rotection Administration | (JEI A) | | | |
| | Korea Eco-label | | | | | |
| | Japan PC Green label* | | | | | |
| Sustainable Impact | Product Carbon Footprint | | | | | |
| Specifications | 80% post-consumer recycled | nlastic | | | | |
| | • Low halogen | F 10000 | | | | |
| | Outside Box and corrugated co | ushions are 100% sustainably s | ourced and recyclable | | | |
| | Molded Paper Pulp Cushion in: | • | • | | | |
| | Recycled Plastic cushions | • | • | | | |
| System Configuration | The configuration used for the l | The configuration used for the Energy Consumption and Declared Noise Emissions data for | | | | |
| | the Notebook model is based or | n a "Typically Configured Notebo | ook". | | | |
| Energy Consumption | | | | | | |
| (in accordance with US ENERGY | | | | | | |
| STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz | | | |
| Normal Operation (Short idle) | 25.82 W | 25.77 W | 25.86 W | | | |
| Sleep | 0.78 W | 0.80 W | 0.78 W | | | |
| Off | 0.21 W | 0.24 W | 0.21 W | | | |
| | NOTE: | | | | | |
| | Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the | | | | | |
| | model family. HP computers ma | | | | | |
| | applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for | | | | | |
| | computers. If a model family does not offer ENERGY STAR® compliant configurations, then | | | | | |
| | energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high | | | | | |
| | efficiency power supply, and a I | Microsoft Windows® operating s | system | | | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz | | | |
| Normal Operation (Short idle) | 88.30 BTU/hr | 88.13 BTU/hr | 88.44 BTU/hr | | | |
| Sleep | 2.66 BTU/hr | 2.73 BTU/hr | 2.66 BTU/hr | | | |
| Off | 0.71 BTU/hr | 0.82 BTU/hr | 0.71 BTU/hr | | | |
| | * NOTE: Heat dissipation is calculevel is attained for one hour. | ılated based on the measured w | atts, assuming the service | | | |
| | | | | | | |
| I angovity and lingrading | This product can be upgraded a | occibly overading its useful life | hy coveral years | | | |
| Longevity and Upgrading | This product can be upgraded, publications of the Upgradeable features and/or co | | by several years. | | | |



Technical Specifications

| | Casua asuta a | | for to "F" of to the | |
|------------------------|--|--|-----------------------------------|--|
| | Spare parts are available throughout the warranty period and or for up to "5" years after the | | | |
| Additional Information | • This | end of production. This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. | | |
| | • This | HP product is designed to comply with the Waste ipment (WEEE) Directive – 2002/96/EC. | Electrical and Electronic | |
| | | product is in compliance with California Proposition king Water and Toxic Enforcement Act of 1986). | on 65 (State of California; Safe | |
| | • This | product is in compliance with the IEEE 1680 (EPEA www.epeat.net | AT) standard at the Silver level, | |
| | • Plas | tics parts weighing over 25 grams used in the prod ISO1043. | duct are marked per ISO11469 | |
| | • This | product is 96.5% recycle-able when properly disp | osed of at end of life. | |
| Packaging Materials | External: | PAPER/Corrugated | 1830 g | |
| | | PAPER/Molded Pulp | 660 g | |
| | Internal: | PLASTIC/Polyethylene Expanded – EPE | 30 g | |
| | | backaging material contains at least 0.0% recycled | | |
| RoHS Compliance | | ted paper packaging materials contains at least 0. lies fully with materials regulations. We were amo | | |
| | extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. | | | |
| | To obtain a c | opy of the HP RoHS Compliance Statement, see HF | RoHS position statement. | |
| Material Usage | This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html): | | | |
| | CertCertplasCadıChlo | estos ain Azo Colorants ain Brominated Flame Retardants – may not be us itics mium orinated Hydrocarbons orinated Paraffins | ed as flame retardants in | |



Technical Specifications

| Technical Specifications | | | |
|----------------------------|---|--|--|
| | Bis(2-Ethylhexyl) phthalate (DEHP) | | |
| | Benzyl butyl phthalate (BBP) | | |
| | Dibutyl phthalate (DBP) | | |
| | Diisobutyl phthalate (DIBP) | | |
| | Formaldehyde | | |
| | Halogenated Diphenyl Methanes | | |
| | Lead carbonates and sulfates | | |
| | Lead and Lead compounds | | |
| | Mercuric Oxide Batteries | | |
| | Nickel – finishes must not be used on the external surface designed to be frequently | | |
| | handled or carried by the user. | | |
| | Ozone Depleting Substances | | |
| | Polybrominated Biphenyls (PBBs) | | |
| | Polybrominated Biphenyl Ethers (PBBEs) | | |
| | Polybrominated Biphenyl Oxides (PBBOs) | | |
| | Polychlorinated Biphenyl (PCB) | | |
| | Polychlorinated Terphenyls (PCT) | | |
| | Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging | | |
| | has been voluntarily removed from most applications. | | |
| | Radioactive Substances | | |
| | Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) | | |
| Packaging Usage | HP follows these guidelines to decrease the environmental impact of product packaging: | | |
| | Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in | | |
| | packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. | | |
| | Design packaging materials for ease of disassembly. | | |
| | Maximize the use of post-consumer recycled content materials in packaging | | |
| | materials. | | |
| | Use readily recyclable packaging materials such as paper and corrugated materials. | | |
| | Reduce size and weight of packages to improve transportation fuel efficiency. | | |
| | Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. | | |
| End-of-life Management and | HP offers end-of-life HP product return and recycling programs in many geographic areas. To | | |
| Recycling | recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your | | |
| | nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in | | |
| | a responsible manner. | | |
| | The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment | | |
| | information for each product type for use by treatment facilities. This information (product | | |
| | disassembly instructions) is posted on the Hewlett Packard web site at: | | |
| | http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other | | |
| | WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP | | |

equipment.

Technical Specifications

| HP, Inc. Corporate | For more information about HP's commitment to the environment: | | |
|---------------------------|--|--|--|
| Environmental Information | | | |
| | Global Citizenship Report | | |
| | http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html | | |
| | Eco-label certifications | | |
| | http://www8.hp.com/us/en/hp-information/environment/ecolabels.html | | |
| | ISO 14001 certificates: | | |
| | http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842 | | |
| | and | | |
| | http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf | | |
| footnotes | Devents on a form of a local development in a discount of a local development of a local de | | |
| rootnotes | Percentage of ocean-bound plastic contained in each component varies by product Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. | | |
| | External power supplies, WWAN modules, power cords, cables and peripherals excluded. | | |
| | 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. | | |
| | Fiber cushions made from 100% recycled wood fiber and organic materials. | | |
| | Plastic cushions are made from >90% recycled plastic | | |
| | | | |



Technical Specifications

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

| Change Log | | | |
|-------------------|----------|---------|---|
| | | | |
| May 2, 2024 | V1 to V2 | Update | Call out images and doc title corrected |
| November 29, 2024 | V2 to V3 | Added | HP Client Management Script Library (CMSL) |
| December 11, 2024 | V3 to V4 | Updated | HP Client Management Script Library (CMSL) Footnote |
| March 7, 2025 | V4 to V5 | Updated | Zero Bright Dot Warranty |
| | | | |
| | | | |

